


Druckverlust VARIO Ø 40 bis PN20 doppel-U (2 Kreise parallel) mit Ethylenglykol 25% @ 0°C

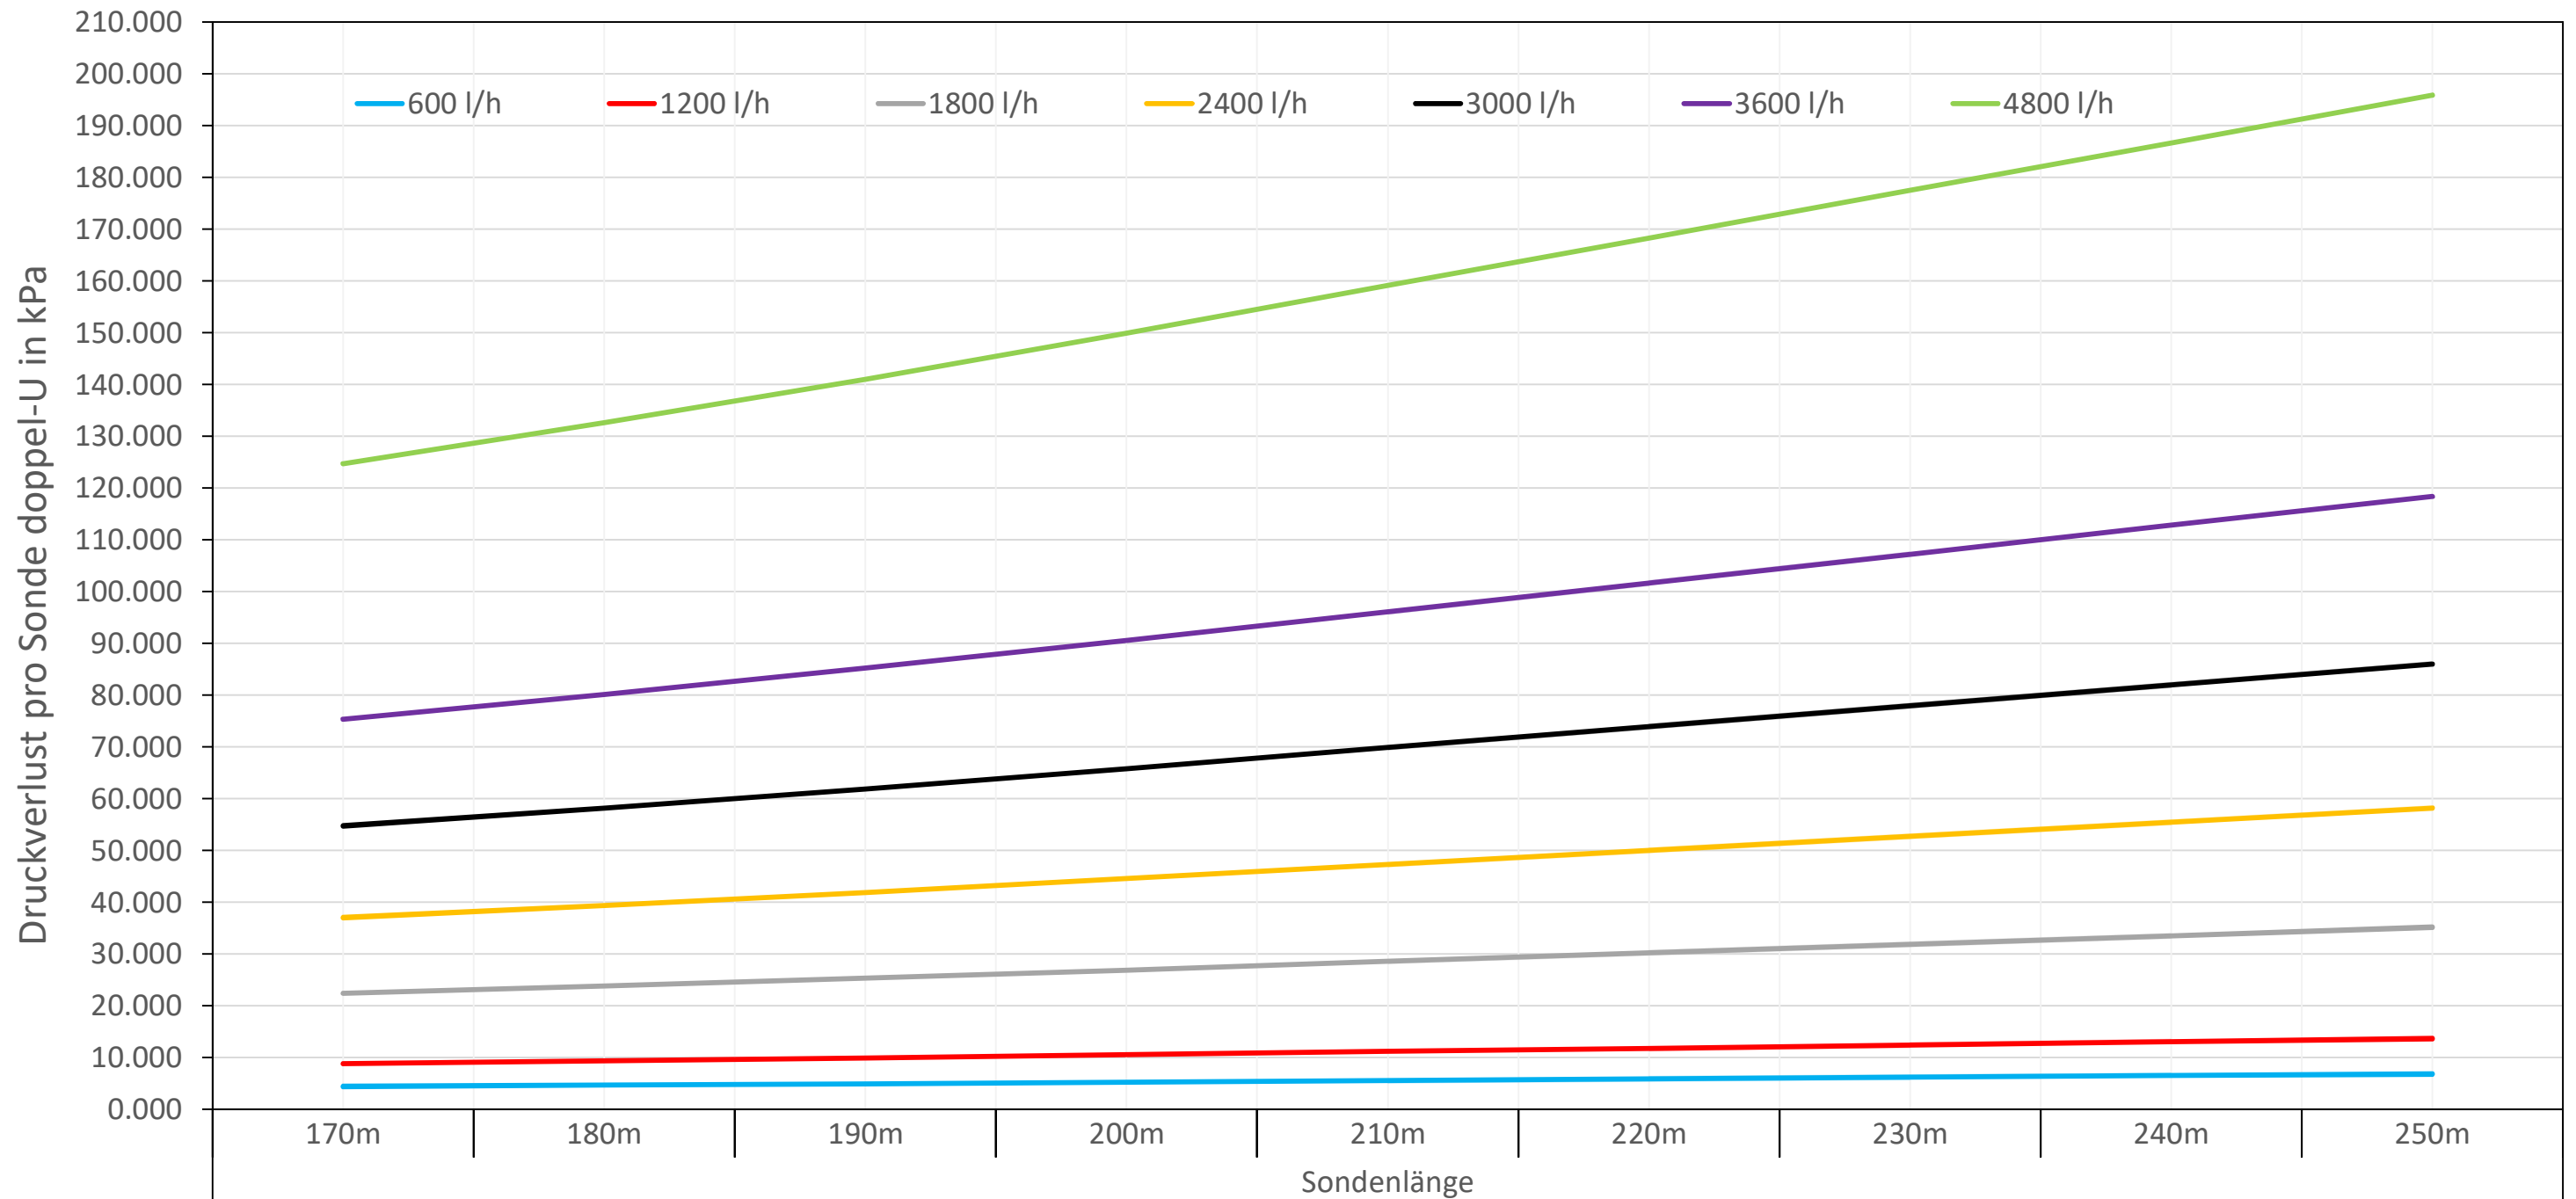

	170m	180m	190m	200m	210m	220m	230m	240m	250m
600 l/h	4.359	4.633	4.922	5.225	5.537	5.848	6.160	6.471	6.783
1200 l/h	8.766	9.315	9.893	10.501	11.124	11.747	12.370	12.993	13.616
1800 l/h	22.344	23.764	25.273	26.875	28.525	30.176	31.827	33.478	35.128
2400 l/h	36.992	39.343	41.839	44.490	47.221	49.952	52.683	55.414	58.145
3000 l/h	54.696	58.171	61.860	65.779	69.814	73.850	77.885	81.921	85.957
3600 l/h	75.291	80.073	85.149	90.542	96.094	101.646	107.199	112.751	118.303
4800 l/h	124.667	132.581	140.982	149.906	159.092	168.278	177.464	186.649	195.835